

## MS-850

The MS-850 boasts of customer-driven features. Foremost, its IP65 rated, heavy-duty, die-cast aluminum case and locking connectors ensure protection from extreme environmental conditions. This 16-ounce industrial raster scanner reliably scans multiple labels—and multiple symbologies—simultaneously at a user-adjustable rate between 350 and 1100 scans per second. The MS-850's programmable raster module allows further adjustments to both raster sweep angle and speed, providing the flexibility to scan a variety of label densities. Built-in mounting holes in the front and back of the scanner allow the MS-850 to be quickly mounted to any flat surface. The MS-850 is ideal for any industry using linear and/or PDF417 labels in high speed and/or industrial environments. It is particularly well suited for packaging, electronics manufacturing, automotive manufacturing, and factory automation applications.

## INDUSTRIAL RASTER SCANNER

**Rugged IP65 Enclosure:** Internal circuitry and optical components are protected from dust and moisture by a heavy-duty, industrial sealed die-cast aluminum case. MicroChange twist-lock connectors provide reliable and uninterrupted connection for the power and trigger ports.

**Multiple Label and Symbology Reading:** The MS-850 offers incredible flexibility not only in its ability to read multiple labels, but also multiple symbology types, both linear and PDF417.

**Preventive Maintenance Features:** Diagnostic controls monitor the operating conditions of the MS-850. Ultimately, these controls—relating to

**Programmable Raster Mirror with Precise Sweeping Arc:** The MS-850 raster module allows accurate mirror oscillation up to 30 sweeps per second. The raster sweep angle is also operator controlled from 0° to 30° providing extremely precise coverage.

**Real-time Controls:** Discrete input/output connections consisting of three opto-isolated programmable outputs, one trigger input, and one programmable input provide versatile programming options. Standard Microscan match code routines such as Match Code, Noread, Mismatch, Sequential Matching, Wild Card Matching, and Number of Good Reads allow for highly controlled automated data acquisition.

**Bar Code Symbologies:** The MS-850 scans multiple symbologies, including PDF417 and all widely used linear bar code symbologies.

- Interleaved 2 of 5
- PDF417
- Code 39
- Code 93
- Code 128
- Codabar
- UPC/EAN
- [Applications Standards](#)
- UCC/EAN-128
- AIAG

Other codes are available, call Microscan for details.

**Service Options:**

- Installation assistance program
- Service agreements
- Training
- On-site service
- Extended warranty







the operating life and temperature, laser current levels, and frequency of power-ups—help prevent costly downtime. For example, user defined messages alert the operator when thresholds have been exceeded and allow for intervention before problems arise.

# MS-850 INDUSTRIAL RASTER SCANNER

## SPECIFICATIONS AND OPTIONS

### MECHANICAL

**Height:** 4.28" (10.9 cm)  
**Width:** 3.74" (9.5 cm)  
**Depth:** 1.76" (4.5 cm)  
**Weight:** 16 oz. (453 g)



### ENVIRONMENTAL

**Enclosure:** Cast aluminum IP65  
**Operating temperature:** 0° to 50°C (32° to 122°F)  
**Storage temperature:** -50° to 75°C (-63° to 167°F)  
**Humidity:** Up to 90% (non-condensing)

### EMISSIONS

**Heavy industrial:** EN 61000-6-2:1999  
**Radiated emission:** EN 55022:1998 Class A 30-1000 MHz  
**Conducted emissions:** EN 55022:1998 Class A 0.15-30 MHz  
**Noise immunity:** IEC 801-4 level 3

### LASER LIGHT

**Type:** Semiconductor visible laser diode (650 nm nominal)  
**Operating life:** 50,000 hours @ 25°C  
**Safety class:** CDRH Class II

### SCANNING PARAMETERS

**Scanner mirror type:** Rotating, 10-faceted

**Scan rate:** Adjustable from 350 to 1100 scans/second (default = 500 sps)  
**Scan width angle:** Typically 60°  
**Pitch:** ±50° maximum  
**Skew:** ±40° maximum

**Label contrast:** 25% min. absolute dark to light differential at 650 nm wavelength

### Raster mirror performance:

Raster sweep angle	Maximum sweeps per second
1°-10°	30
11°-20°	20
21°-30° (max.)	10

### COMMUNICATION

**Interface:** RS-232, RS-422/485, \*SDS, \*DeviceNet, \*Profibus, \*Ethernet, daisy chain/auxiliary port capable

\* Used in conjunction with an accessory protocol box.

### READ RANGES<sup>1</sup>

Narrow-bar-width	High Density
.005" (.127 mm)	1.5" to 2.5" (3.81 to 6.35 cm)
.0075" (.190 mm)	1" to 3.5" (2.54 to 8.89 cm)

Narrow-bar-width	Medium Density
.0075" (.190 mm)	2.5" to 5" (6.35 to 12.7 cm)
.010" (.254 mm)	1" to 6" (2.54 to 15.24 cm)
.015" (.381 mm)	1" to 8" (2.54 to 20.32 cm)
.020" (.508 mm)	1" to 11" (2.54 to 27.94 cm)
.030" (.762 mm)	1" to 14" (2.54 to 35.56 cm)

Narrow-bar-width	Low Density
.015" (.381 mm)	6" to 15" (15.24 to 38.1 cm)
.020" (.508 mm)	6" to 20" (15.24 to 50.8 cm)
.030" (.762 mm)	6" to 24" (15.24 to 60.96 cm)
.040" (1.02 mm)	6" to 30" (15.24 to 76.2 cm)

<sup>1</sup>: At 500 decodes per second using Code 39 grade A label.

### CODE TYPES

**Standard Offerings:** Code 128, Code 39, Code 93, Codabar, Interleaved 2 of 5, UPC/EAN, PDF417  
**Applications Standards:** AIAG, UCC/EAN-128

### CONNECTORS/PIN ASSIGNMENTS

**Host Connector:** 25-pin D-subminiature plug

Pin No.	Host RS232	Host & Aux RS232	Host RS422/485	In/Out
1	Chassis ground			
2	Host TxD			Out
3	Host RxD			In
4	RTS	Aux TxD		Out
5	CTS	Aux RxD		In
6	Output 1 (+)			Out
7	Signal Ground			
8	Output 2 (+)			Out
9	Trigger (-)			In
10	Trigger (+)			In
11	Default configuration <sup>a</sup>			In
12	Input 1 (+)			In
13		RxD (+)		In
14		TxD (-)		Out
15	Noread/Output 3 (+)			Out
16		RxD (-)		In
17	Power Ground			In
18	Power +10 to 28 VDC			In
19		TXD +		Out
20	Output 1 (-)			Out
21	Output 2 (-)			Out
22	Noread/Output 3 (-)			Out
23	Input 1 (-)			In
24	New master (-)			In
25	New master (+)			In



<sup>a</sup> The default is activated by connecting pin 11 to ground pin 7.

**Trigger Connector:** 4-pin MicroChange

Pin No.	Function	In/Out
1	Power + 10 to 28 VDC	Out
2	NPN	
3	Power Ground	
4	NC	

**Power Connector:** 3-pin MicroChange

Pin No.	Function	In/Out
1	Power ground	
2	NC	
3	Power + 10 to 28 VDC	In

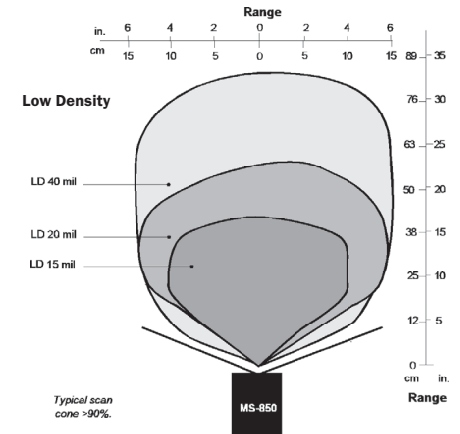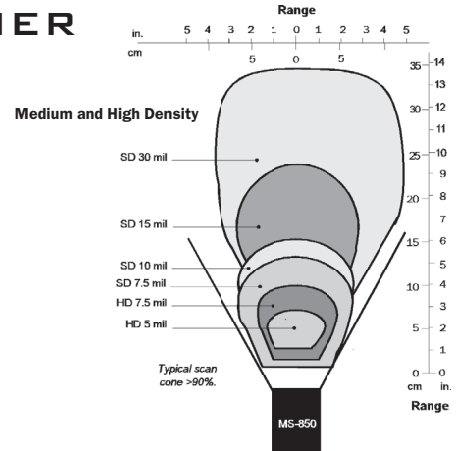

### ELECTRICAL

**Power Requirement:** 10-28 VDC, 200 mV p-p max. ripple, 140 mA at 24 VDC (typ.)  
**Trigger, New Master, Input 1:** Optoisolated, 5-28V rated, (12 mA at 24 VDC)  
**Outputs (1, 2, 3):** Optoisolated, 10-28 VDC rated, (I<sub>CE</sub> <100 mA at 24 VDC, current limited by user)

### SAFETY CERTIFICATIONS

FCC, CDRH, CE, UL/cUL, TÜV, BSMI



ISO 9001/Cert. No. 00-1047

©2001 Microscan Systems, Inc. 9/01 Specifications subject to change. Updates to this specification can be found on-line at [www.microscan.com](http://www.microscan.com).

Product specifications are given for typical performance at 25°C (77°F) using grade A labels. Some performance characteristics may vary at high temperatures or other environmental extremes.

**Warranty**—One year limited warranty on parts and labor. Extended warranty available.

## MICROSCAN®

**Microscan Systems, Inc.**

Tel 425 226 5700 / 800 251 7711  
 Fax 425 226 8250

**Microscan Europe**

Tel 31 172 423360 / Fax 31 172 423366

**Microscan Asia Pacific R.O.**

Tel 65 846 1214 / Fax 65 846 4641

Part of a full range of sales tools available from our web site:

**www.microscan.com**

E-mail: [helpdesk@microscan.com](mailto:helpdesk@microscan.com)